
Specifications

- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.5 mm
- Size: 6" x 48" (152 mm x 1219 mm)
- 100% Phthalate Free Reach Compliant
- Warranty: 20-Year Light and Heavy Commercial & Lifetime Residential



- Patented Coating
- 30% More Scratch Resistance **Over Typical Coatings**
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

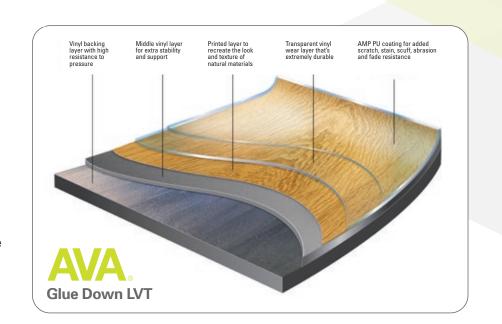

EIR Embossing

The 2DSGN Tuscany and Alpine palettes have an EIR embossing which stands for Embossed in Register.

EIR is a manufacturing method that creates a grain appearance consistent with the look of a real hardwood grain. This process aligns the embossing on the sheet with the printed wood grain design and intensifies the visual impact of the depth, texture and appearance of the floor while still providing durability and ease of maintenance.



ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B	
ASTM F1914 RESIDUAL INDENTATION:	PASSES, <10%	
ASTM F137 FLEXIBILITY:	PASSES, 25.4MM MANDREL	
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.020 IN. PER LIN. FT.	
ASTM F925 CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)	
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E	
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E	
ASTM F970 STATIC LOAD LIMIT:	PASSES, 250 LBS.	
ASTM F970 MODIFIED FOR MAX WEIGHT:	1,200 LBS.	
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²	
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450	
ASTM D2047 SLIP RESISTANCE:	>0.6 (DRY)	

Other products in the AVA collection: AVA DSGN® AVA STYL® AVA SNSE® AVA SPRK® AVA SMPL® AVA 2STYL® AVA VRSE® AVA RSRV® AVA REVV® AVA VEXX® AVA MRGE™ AVA RYME™ AVA ORBT™

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, STYL®, SNSE®, SPRK®, SMPL®, 2STYL®, VRSE®, RSRV®, REVV®, VEXX®, 2DSGN™, MRGE™, RYME™ and ORBT™ are trademarks of Novalis® Innovative Flooring.

© 2020 Novalis® Innovative Flooring

avaflor.com • 877.861.5292





AVA.2DSGN

he highly durable AMP finish provides 30% more scratch resistance over typical coatings, making 2DSGN suitable for high traffic Retail, Healthcare, Education and Corporate environments, as well as Multi-Family settings.

Meticulously designed to look like

ardwoods and built to endure heavy trai

2DSGN glue down planks offer soft woo

rains and contemporary styles with a

palanced palette of 22 colors. The Alpine

and Tuscany collections feature registere

dges while the Peninsula and Weathere

ections are straight-edge planks.

bossed finishes with microbevel






























AVA.2DSGN

Peninsula Oak Canyon

Peninsula

PO2D002 Peninsula Oak Timber

Straight Edge

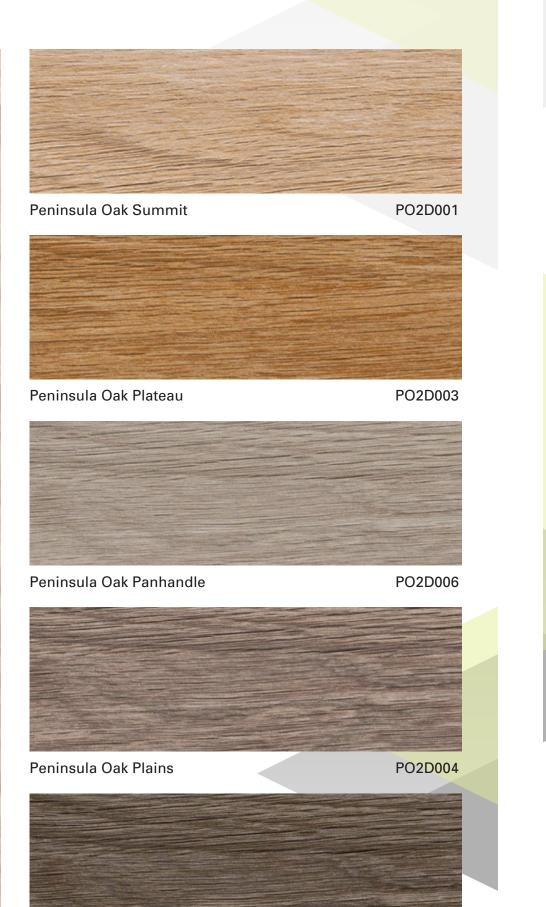

Alpine










AO2D007 AO2D009 Alpine Oak Syrup

Weathered



Tuscany

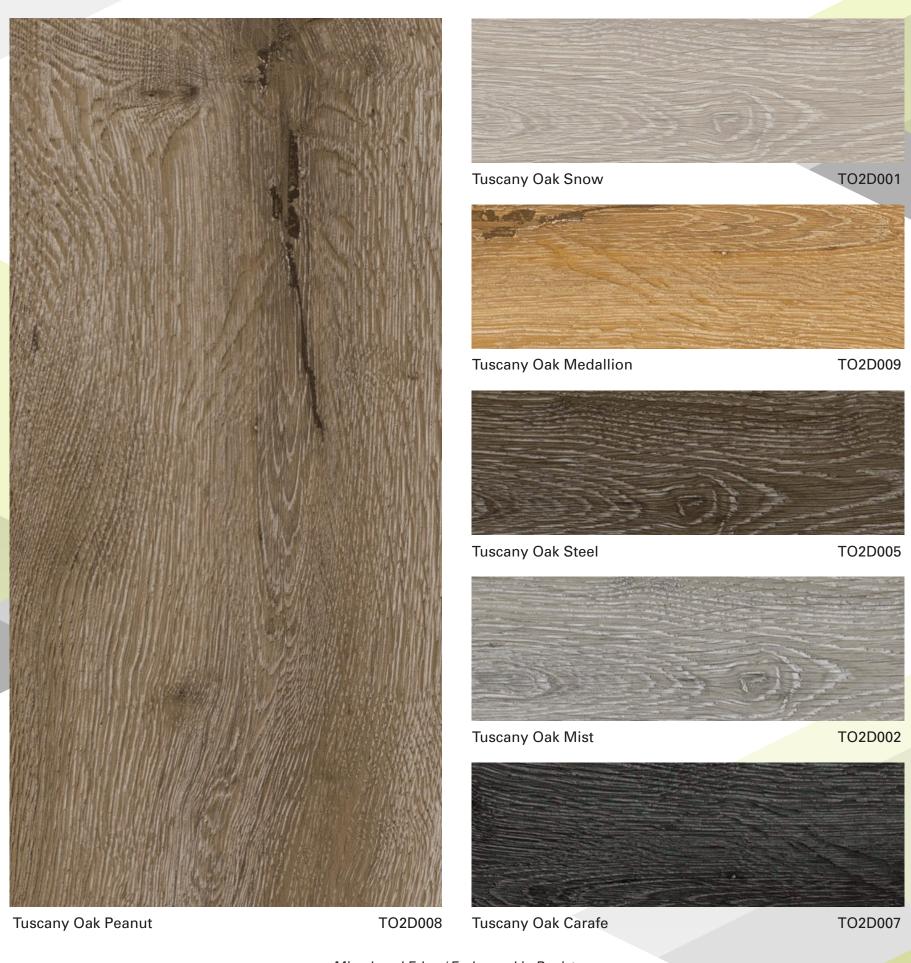

Microbevel Edge / Embossed in Register

Alpine Oak Anchor

PO2D005

Straight Edge

Microbevel Edge / Embossed in Register