


Specifications

- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.5 mm
- Size: 36" x 36" (914 mm x 914 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: Lifetime Residential, 20-Year Heavy Commercial



AVA
Glue Down LVT

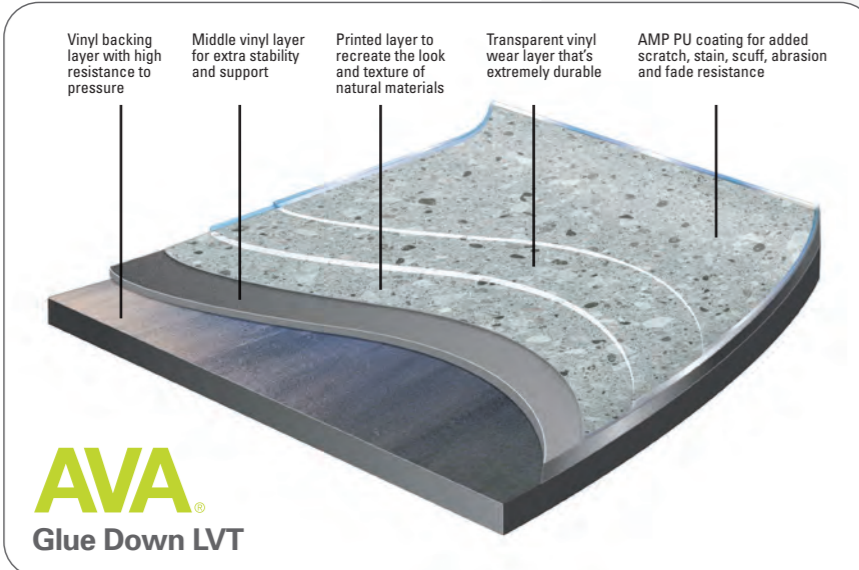

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- High-gloss finish

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F2055 SIZE:	PASSES, ± 0.4 MM
ASTM F387 PRODUCT THICKNESS:	PASSES, ± 0.13 MM
ASTM F2055 SQUARENESS:	PASSES, ± 0.25 MM
ASTM F1914 RESIDUAL INDENTATION:	PASSES, ≤ 0.2 MM
ASTM F137 FLEXIBILITY:	PASSES, 25.4 MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.5 MM PER LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES ASTM F1700 REQUIREMENTS
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT (MODIFIED):	≤ 0.13 MM INDENT, 1,600 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.5 SCOF (NO RAMPS)

AVA

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA® and 2TRZO™ are trademarks of Novalis® Innovative Flooring.

© 2022 Novalis® Innovative Flooring



avaflor.com • 877.861.5292
sales@avaflor.com

AVA 2TRZO




NOVALIS
INNOVATIVE FLOORING


AVA 2TRZO

AVA 2TRZO




AVA 2TRZO™ LVT features a full line of unique terrazzo/stone visuals in a range of neutral tones with light and dark accent chips for versatile, distinctive design options and a variety of applications. 2TRZO™ is offered in a large format 36" x 36" tile in a 2.5 mm glue-down construction with a 22 mil wear layer, and our proprietary AMP coating makes it an ideal flooring product for installations in Education, Corporate, Retail, Hospitality and other high-traffic commercial environments. 2TRZO™ is FloorScore® certified and is phthalate free, Greenguard Gold certified, has Declare label, EPD & HPD.

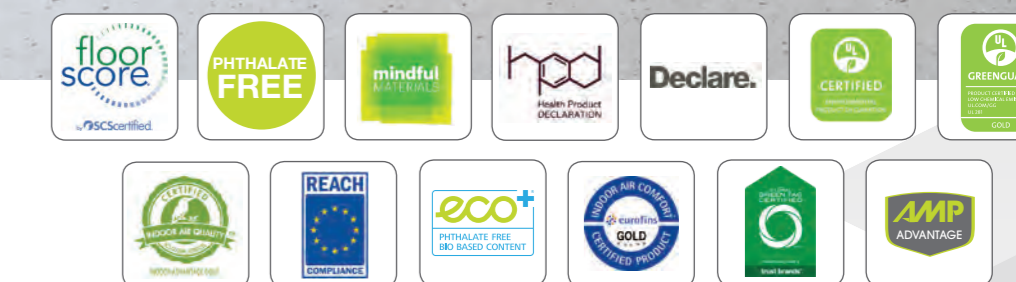


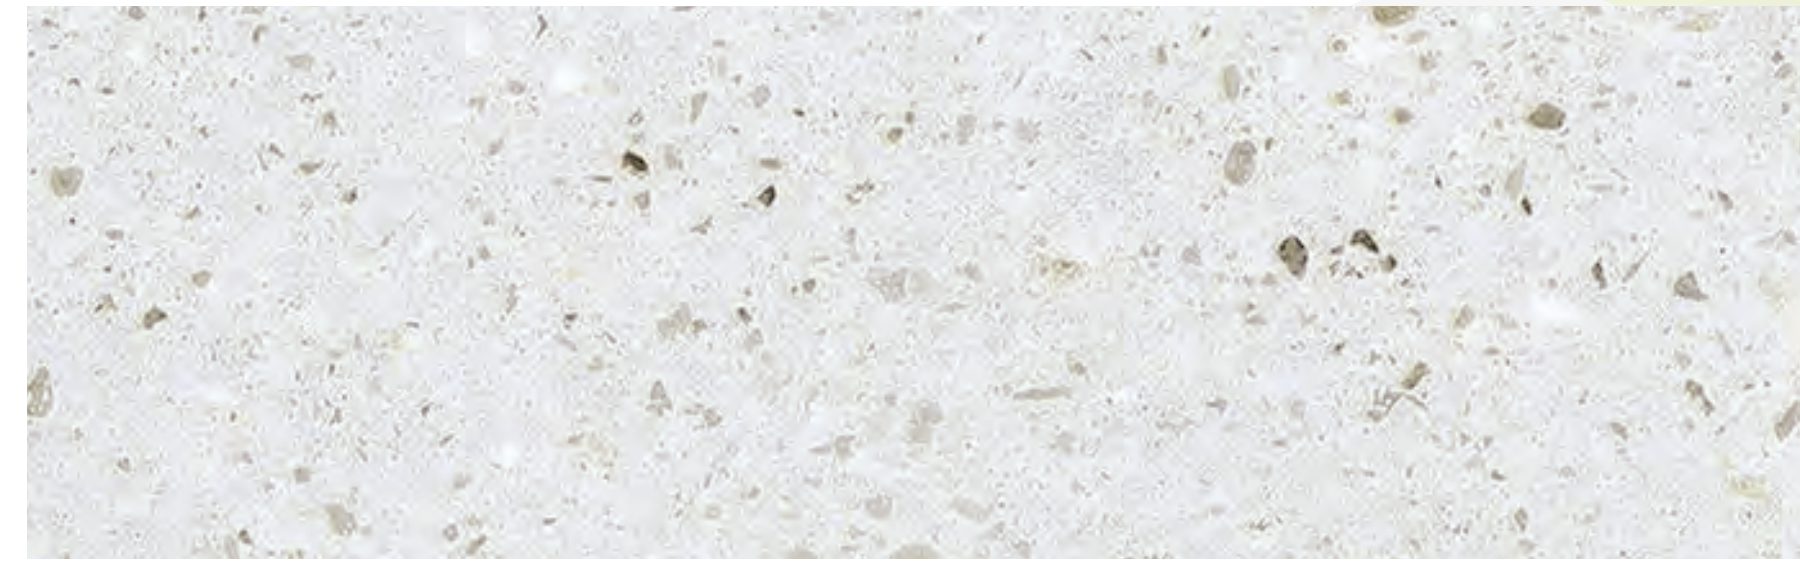


TER012

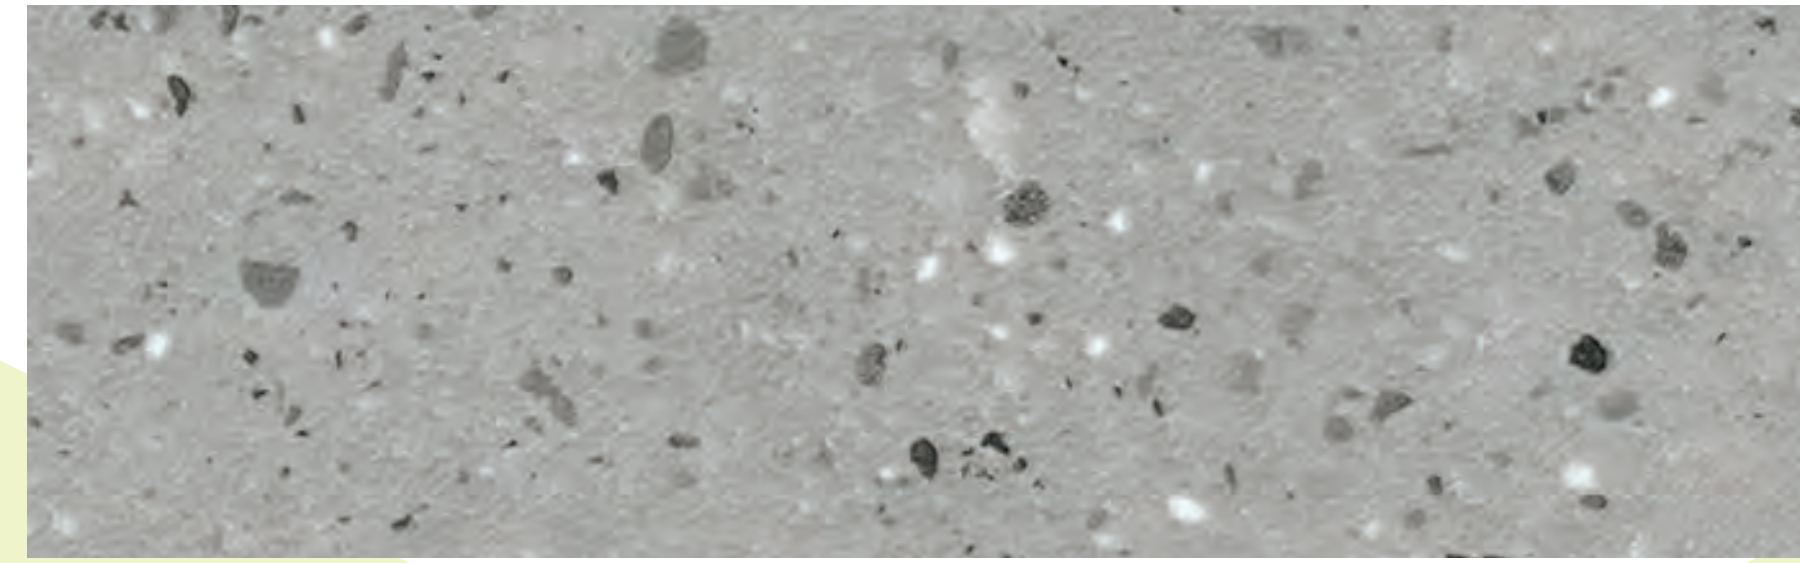


TER014

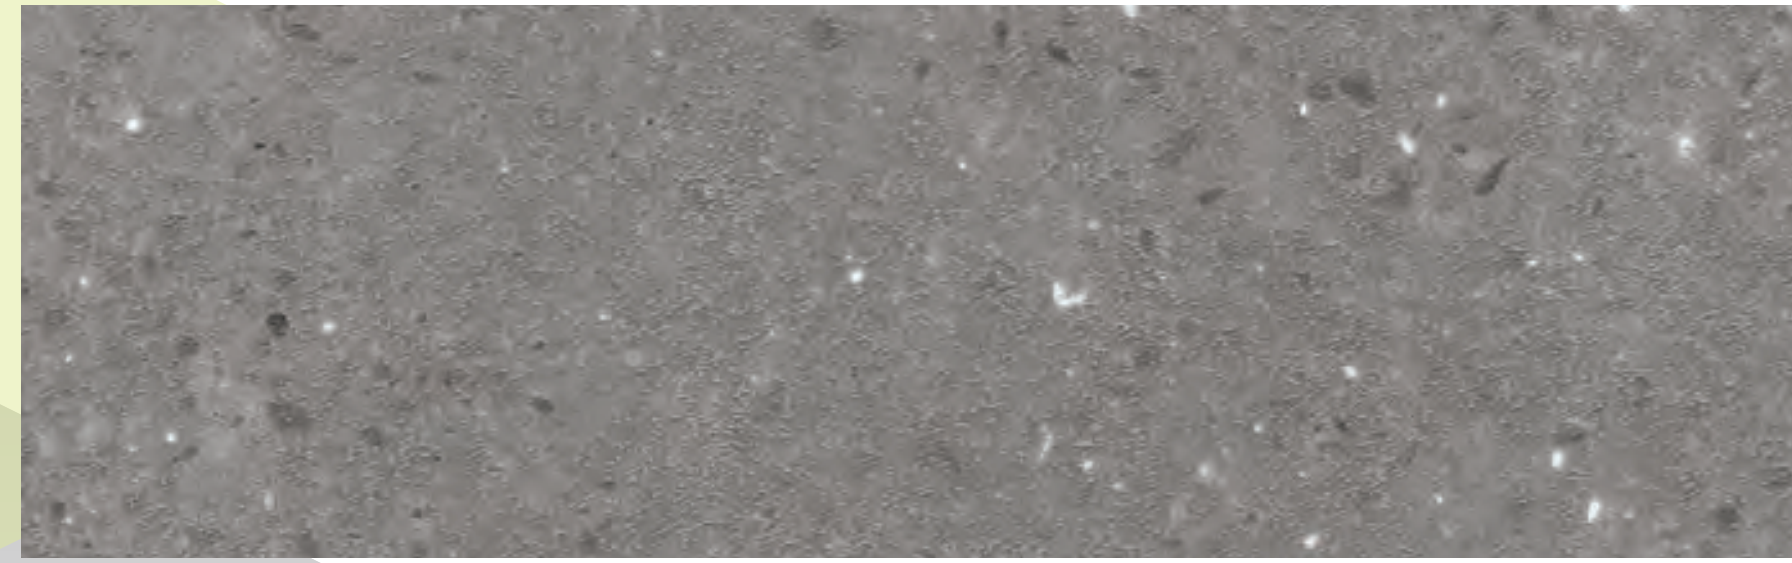


TER016

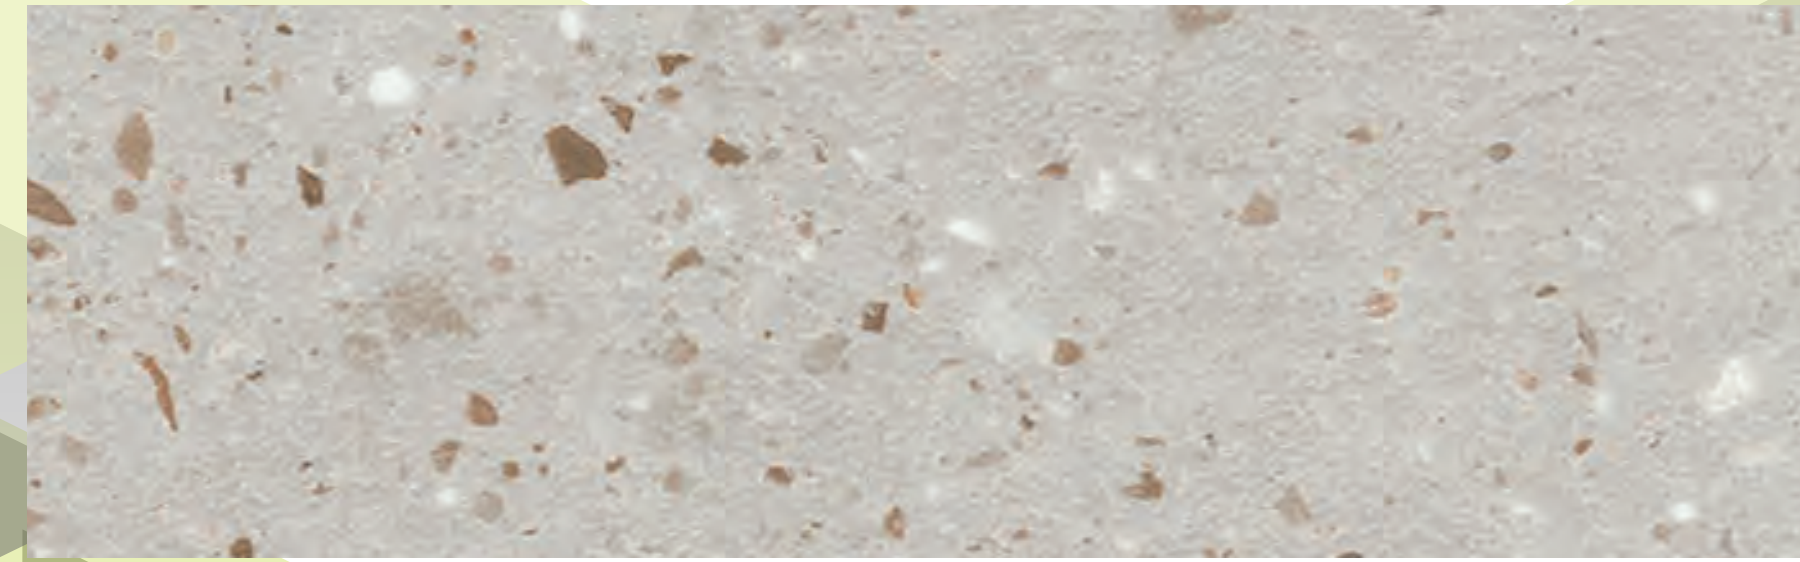

TER015

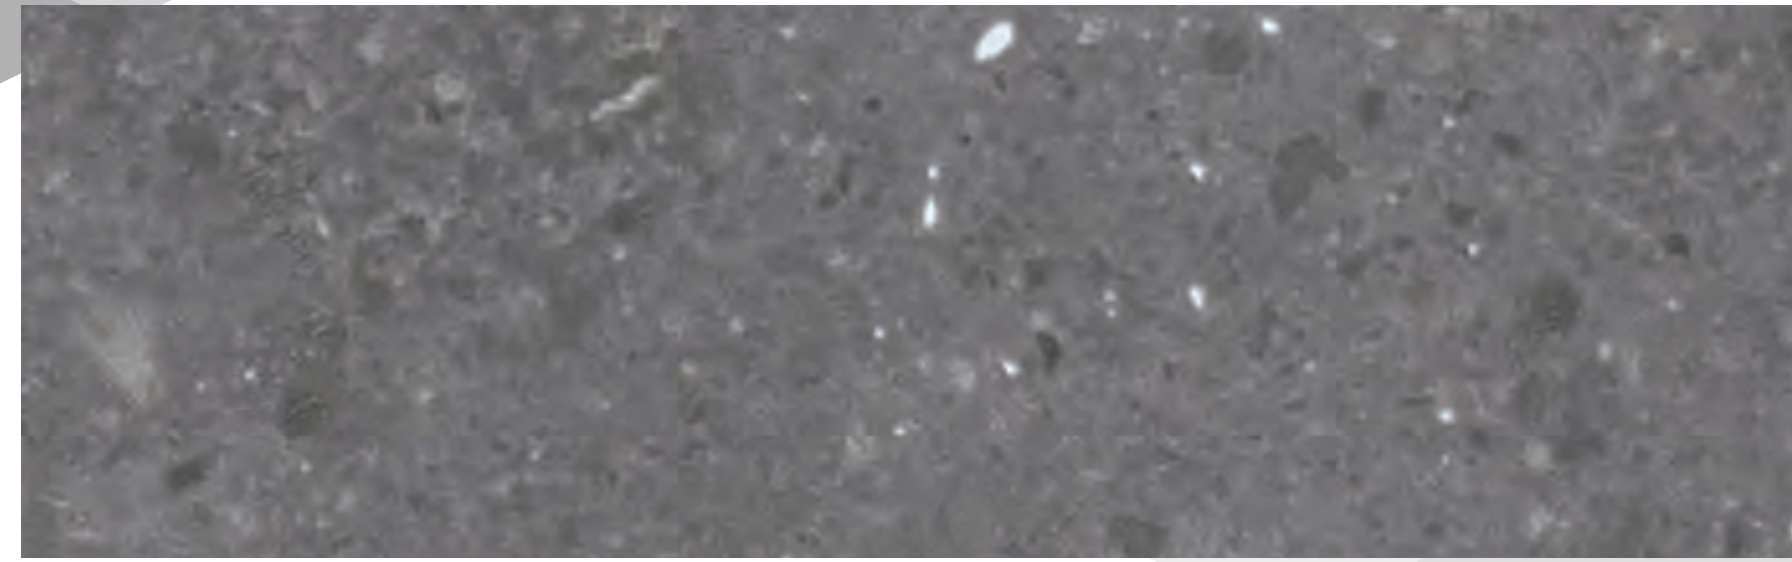

TER017

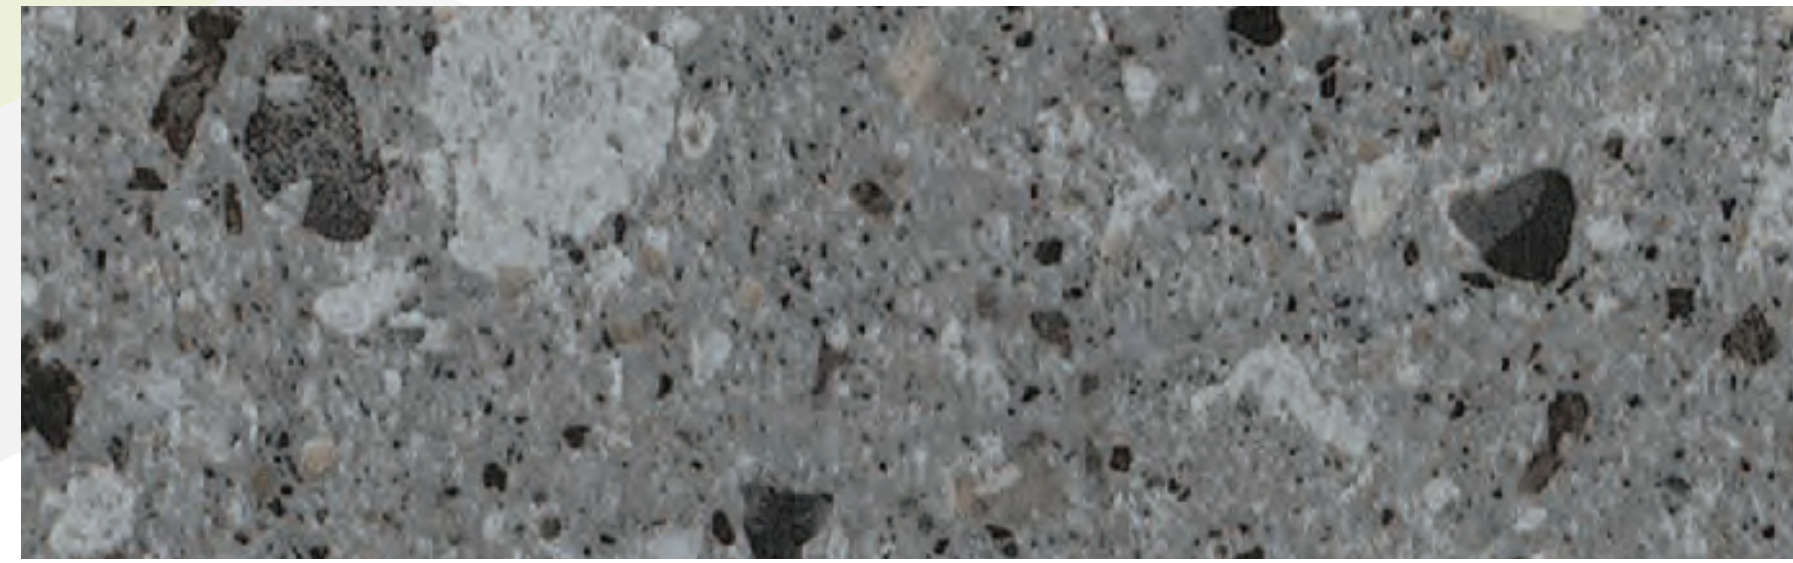

TER002



TER004



TER006



TER009