
FAVE Specifications

- MADE IN USA
- HDC Clic
- Thickness/Wear Layer: 5.2 mm 22mil (.55)
- 5.0 mm 12mil (.30)
- Size: 5.75" x 47.75" (146 mm x 1212 mm)
- Microbevel Edge
- Waterproof
- 100% Phthalate Free
- Warranty: 15-Year Commercial (22mil), 10-Year Commercial (12mil) & Lifetime Residential



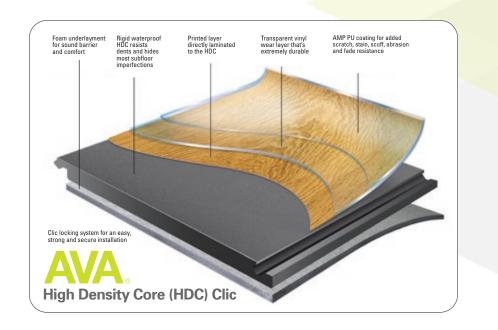

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

ASTM F3261 RIGID POLYMERIC CORE FLOORING:	CLASS I, TYPE B, GRADE 1, BACKING CLASS B
ASTM F1914 RESIDUAL INDENTATION:	PASSES, <0.007 IN.
ASTM F1914 SURFACE INTEGRITY:	PASSES, NO PUNCTURE
ISO 23999 DIMENSIONAL STABILITY:	PASSES, <0.2% / LIN. FT.
ISO 23999 CURLING:	PASSES, <0.08 IN.
ASTM F925 CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT:	PASSES, 250 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.6 (DRY)



With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA® and FAVE™ are trademarks of Novalis® Innovative Flooring.

© 2021 Novalis® Innovative Flooring





avaflor.com • 877.861.5292









AVA FAVE 1M AVA FAVE













inging the best and most popular des

back for another run, AVA® FAVE™ takes

your 10 favorite AVA® designs and brings a MADE IN THE USA impact. FAVE™'s

ligh Density Core (HDC) provide a true,

waterproof rigid-core performance in large 5.75" x 47.75" clic planks with attached

oustical backing that provides superior and control performance.


AVA FAVE



Alpine Oak Khaki 12 mil: AO005S-503U / 22 mil: AO005S-5255U



Alpine Oak Anchor 12 mil: AO009S-503U / 22 mil: AO009S-5255U

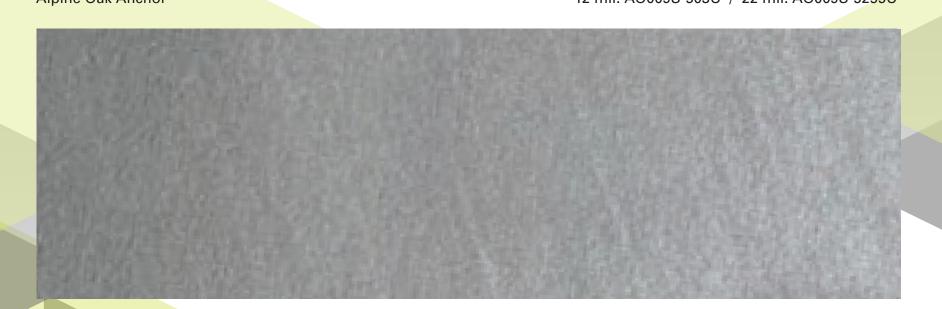

Acoustical Backing T



Tuscany Oak Snow 12 mil: T0001S-503U / 22 mil: T0001S-5255U



Tuscany Oak Mist 12 mil: TO002S-503U / 22 mil: TO002S-5255U



Tuscany Oak Medallion 12 mil: TO009S-503U / 22 mil: TO009S-5255U



Peninsula Oak Canyon 12 mil: PO002S-503U / 22 mil: PO002S-5255U



Peninsula Oak Plains 12 mil: PO004S-503U / 22 mil: PO004-525



Tuscany Oak Peanut 12 mil: T0008S-503U / 22 mil: T0008S-5255U



 Baltic Oak Taupe
 12 mil: BO002S-503U / 22 mil: BO002S-5255U



Itic Oak Suede 12 mil: BO003S-503U / 22 mil: BO003S-5255U



