


Specifications

- Loose Lay
- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 5.0 mm
- Size, Peninsula / Alpine / Tuscany: 9" x 48" (228 mm x 1219 mm)
- Size, Béton: 39.37" x 39.37" (1000 mm x 1000 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: 20-Year Commercial & Lifetime Residential

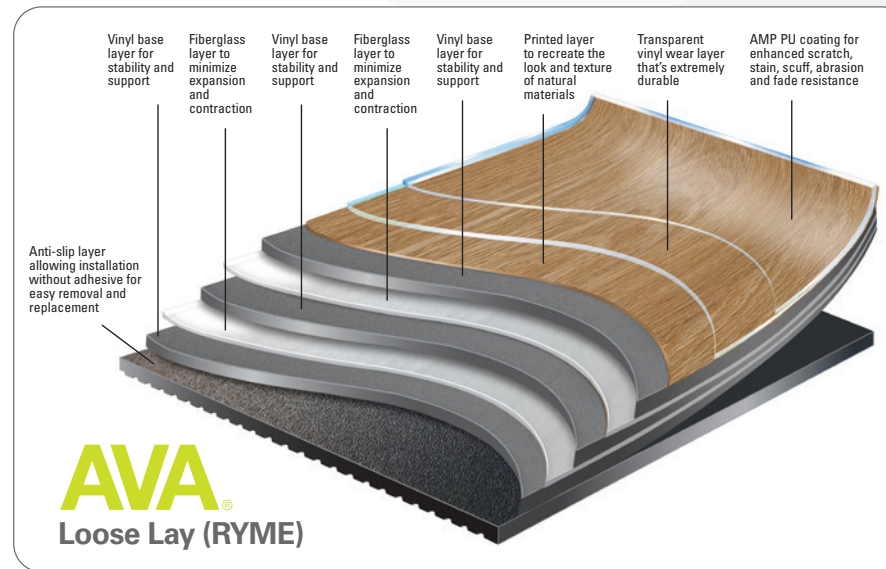

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F1914 RESIDUAL INDENTATION:	PASSES, <10%
ASTM F137 FLEXIBILITY:	PASSES, 25.4MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.020 IN. PER LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT:	PASSES, 250 LBS.
ASTM F970 MODIFIED FOR MAX WEIGHT:	1,200 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.6 (DRY)



AVA

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA[®] and RYME[™] are trademarks of Novalis[®] Innovative Flooring.

© 2024 Novalis[®] Innovative Flooring



avaflor.com • 877.861.5292
sales@avaflor.com



Tuscany Oak Peanut


AVA[®] RYME[™] LOOSE LAY



NOVALIS[®]
INNOVATIVE FLOORING

AVA RYME

AVA RYME

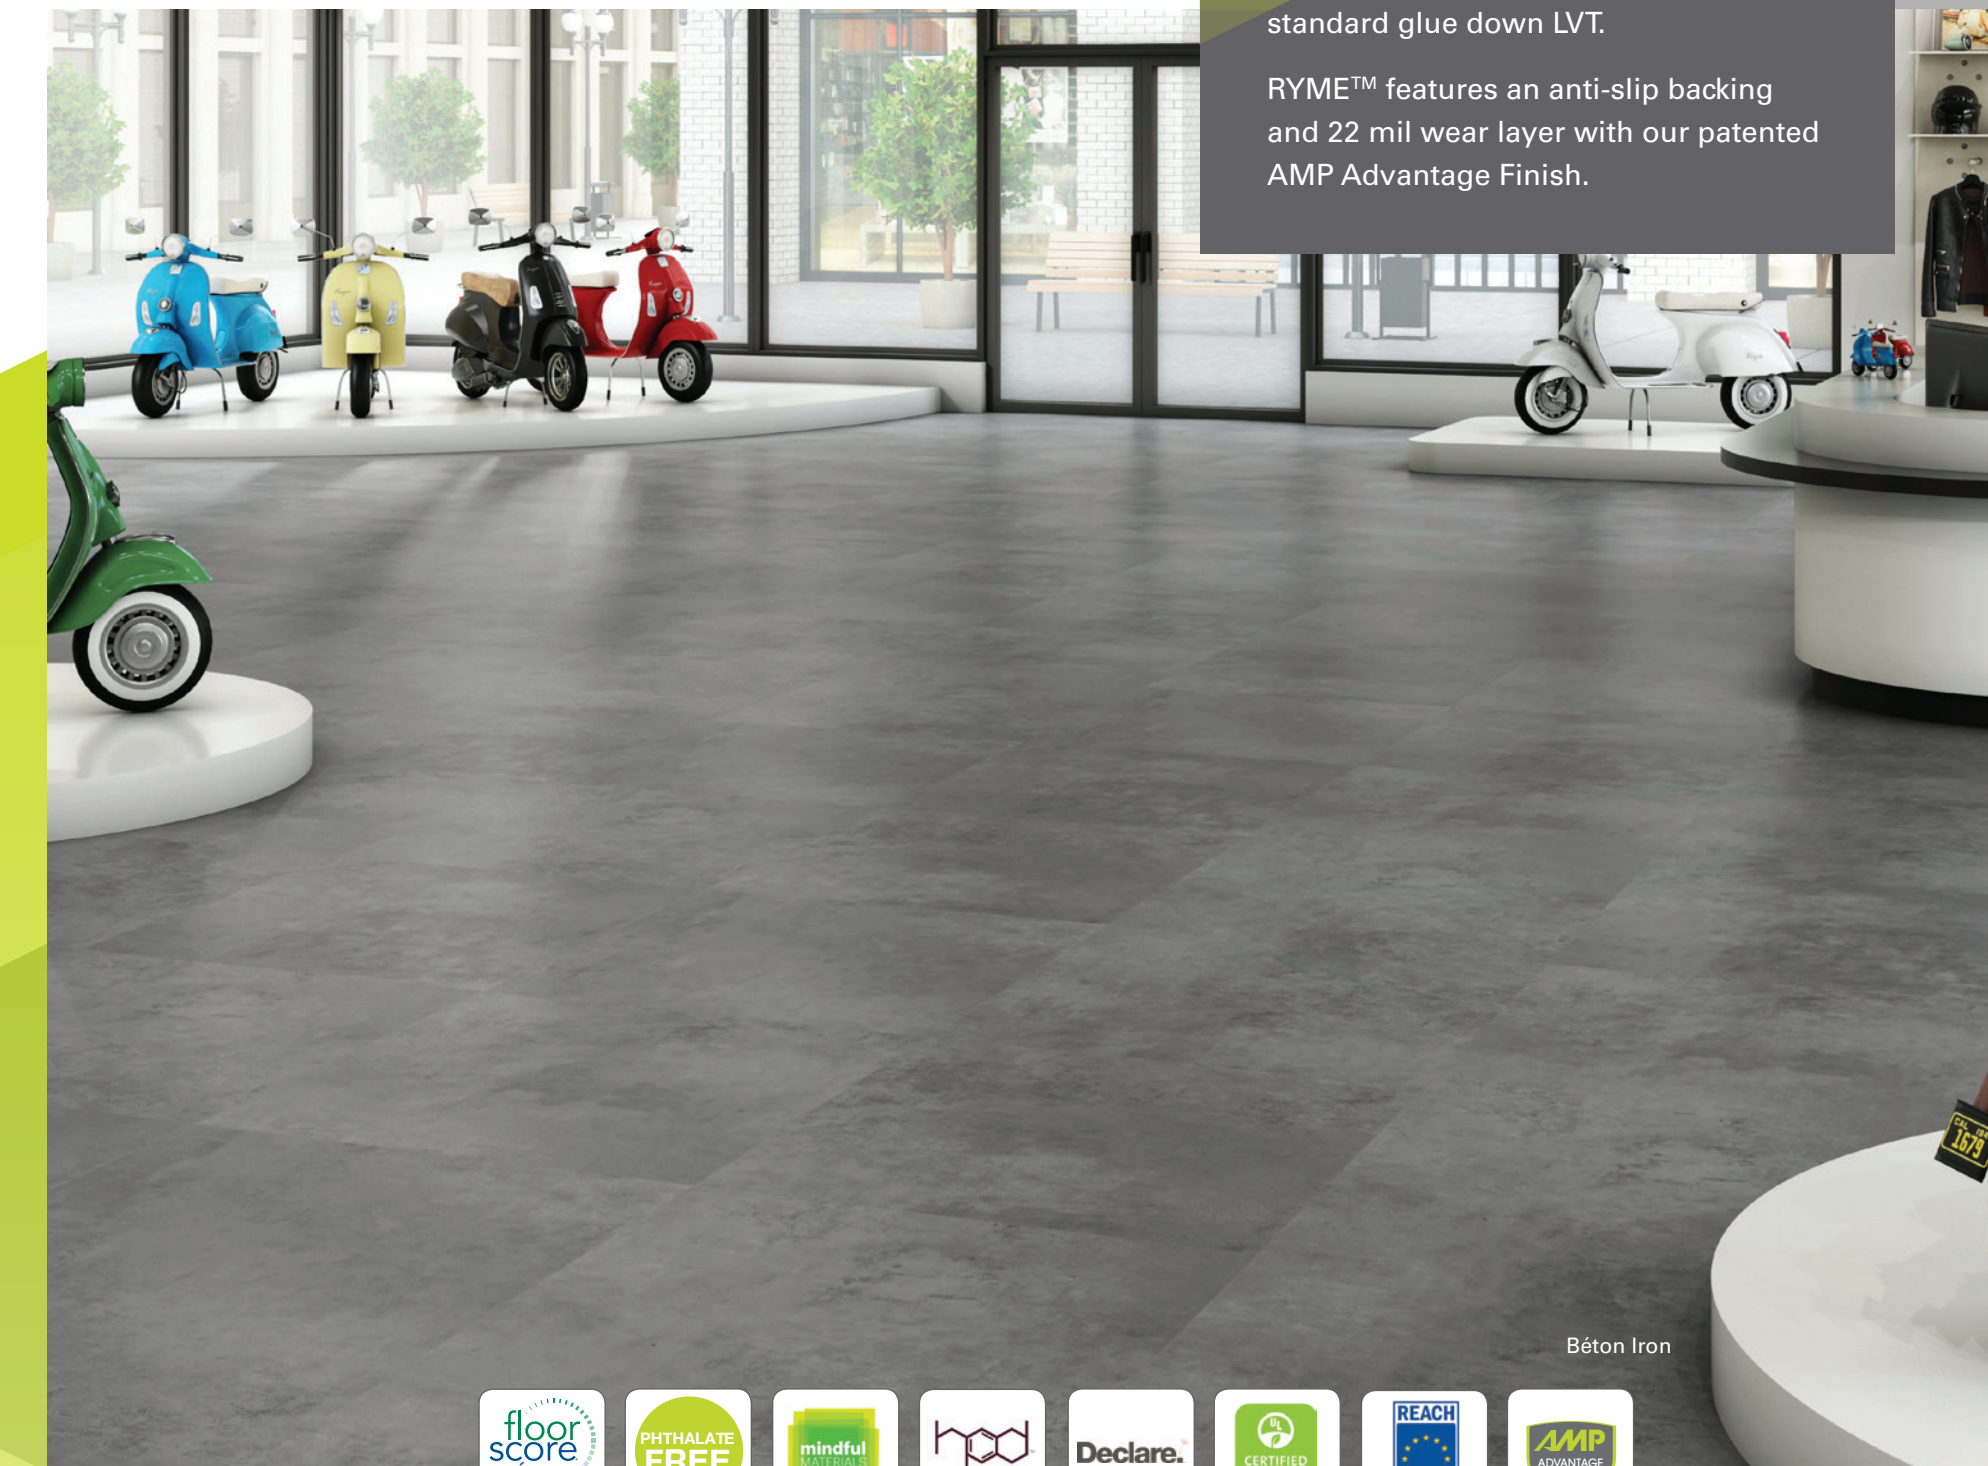

Béton Iron




Featuring 16 popular colors to complement other AVA[®] collections, AVA[®] RYME[™] offers large 9" x 48" loose-lay planks in contemporary and rustic classic oak designs, plus four unique concrete designs in 39.37" x 39.37" tiles. Quick and easy to install with less floor prep, RYME[™] hides flooring imperfections better than standard glue down LVT.

RYME[™] features an anti-slip backing and 22 mil wear layer with our patented AMP Advantage Finish.

Peninsula
(9" x 48" / 228 mm x 1219 mm)

Straight Edge

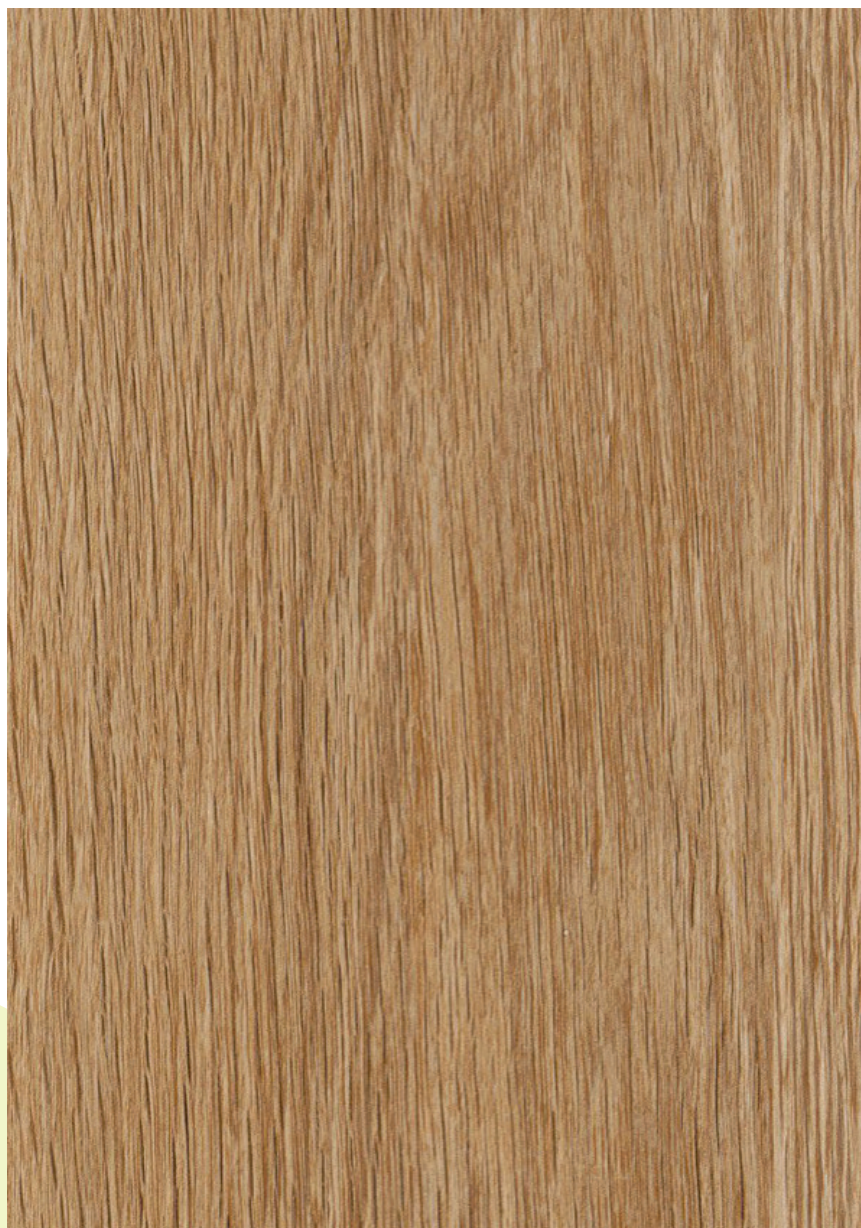

Peninsula Oak Canyon

PO2D002L



Peninsula Oak Summit

PO2D001L



Peninsula Oak Panhandle

PO2D006L



Peninsula Oak Timber

PO2D005L



Anti-Slip Backing

Alpine
(9" x 48" / 228 mm x 1219 mm)

Microbevel Edge / Embossed in Register



Alpine Oak Anchor

AO2D009L



Alpine Oak Prestige

AO2D008L



Alpine Oak Khaki

AO2D005L



Alpine Oak Syrup

AO2D007L

Tuscany
(9" x 48" / 228 mm x 1219 mm)

Microbevel Edge / Embossed in Register



Tuscany Oak Peanut

TO2D008L




Tuscany Oak Snow

TO2D001L



Tuscany Oak Mist

TO2D002L

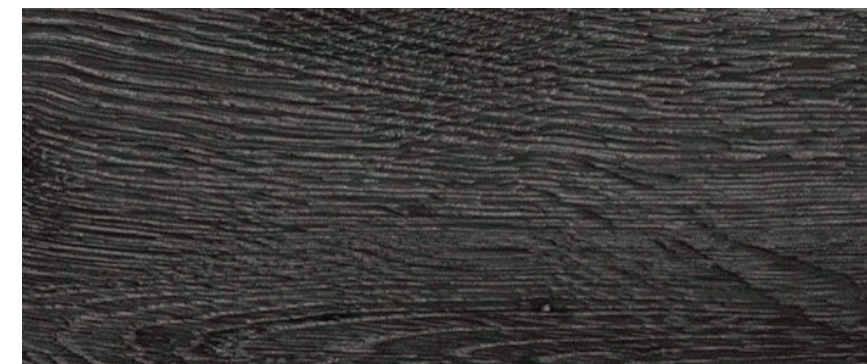

Tuscany Oak Carafe

TO2D007L

EIR Embossing

The RYME Alpine and Tuscany palettes have an EIR embossing which stands for Embossed in Register.

EIR is a manufacturing method that creates a grain appearance consistent with the look of a real hardwood grain. This process aligns the embossing on the sheet with the printed wood grain design and intensifies the visual impact of the depth, texture and appearance of the floor while still providing durability and ease of maintenance.



Tuscany Oak Peanut

Béton
(39.37" x 39.37" / 1000 mm x 1000 mm)

Straight Edge



Béton Pearl

BN001L



Béton Iron

BN002L



Béton Steel

BN003L



Béton Harbor

BN004L