


## RYSE™ Specifications

- Thickness/Wear Layer:  
2.0 mm 12 mil (0.30 mm)  
2.5 mm 22 mil (0.55 mm)
- Size: 6" x 48" (152 mm x 1219 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: 20-Year Heavy Commercial (22 mil),  
10-Year Heavy Commercial (12 mil) &  
Lifetime Residential

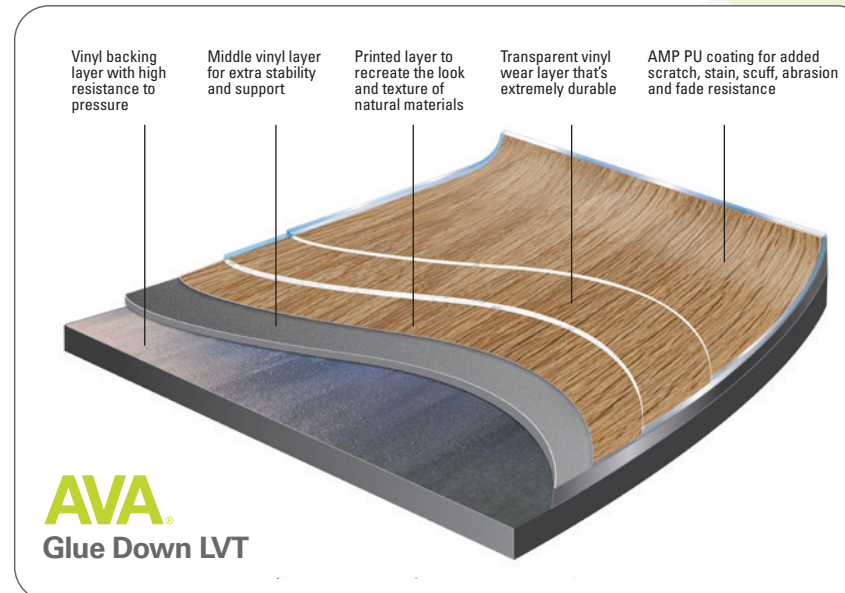

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F2055 SIZE:	PASSES, ± 0.4 MM
ASTM F387 THICKNESS OF RESILIENT FLOORING:	PASSES, ± 0.13 MM
ASTM F2055 SQUARENESS:	PASSES, ± 0.25 MM
ASTM F1914 RESIDUAL INDENTATION:	PASSES, ≤ 0.2 MM
ASTM F137 FLEXIBILITY:	PASSES, 25.4MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, < 0.5 MM / LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES ASTM F1700 REQUIREMENTS
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < ΔE 8
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < ΔE 8
ASTM F970 STATIC LOAD (MODIFIED):	≤ 0.4 MM INDENT, 1600 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 / UL 410 SLIP RESISTANCE:	> 0.5 SCOF (NO RAMPS)

# AVA

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA® and RYSE™ are trademarks of Novalis® Innovative Flooring.

© 2024 Novalis® Innovative Flooring



avafloor.com • 877.861.5292  
sales@avafloor.com



Baltic Oak Suede

# AVA RYSE



NOVALIS®  
INNOVATIVE FLOORING

# AVA RYSE

# AVA RYSE



Baltic Oak Taupe

With 10 popular wood looks and realistic embossed surface, AVA® RYSE™ provides superior beauty and performance in 6" x 48" glue-down planks with a straight edge.

AVA's proprietary AMP Advantage coating makes RYSE™ the perfect solution for your heavy-traffic areas, including areas with heavy rolling loads. RYSE™ is the ideal flooring for corporate offices, retail spaces, hospitality and a variety of other commercial environments.





Alpine Oak Khaki

12 mil: AO005-203K / 22 mil: AO005-2555K



Alpine Oak Anchor

12 mil: AO009-203K / 22 mil: AO009-2555K



Peninsula Oak Canyon



Tuscany Oak Snow

12 mil: TO001-203K / 22 mil: TO001-2555K




Tuscany Oak Mist

12 mil: TO002-203K / 22 mil: TO002-2555K



Tuscany Oak Medallion

12 mil: TO009-203K / 22 mil: TO009-2555K

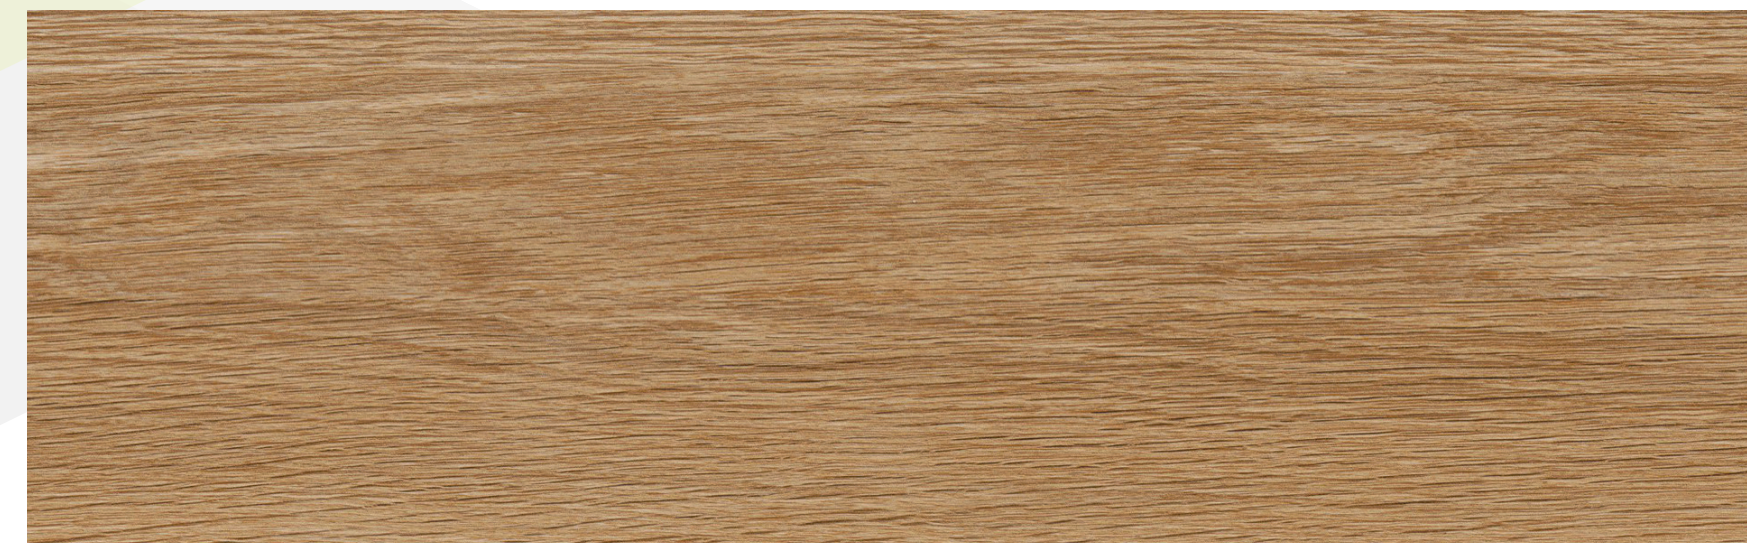

Peninsula Oak Canyon

12 mil: PO002-203K / 22 mil: PO002-2555K



Peninsula Oak Plains

12 mil: PO004-203K / 22 mil: PO004-2555K



Tuscany Oak Peanut

12 mil: TO008-203K / 22 mil: TO008-2555K



Baltic Oak Taupe

12 mil: BO002-203K / 22 mil: BO002-2555K



Baltic Oak Suede

12 mil: BO003-203K / 22 mil: BO003-2555K



Alpine Oak Anchor