
Specifications

- Loose Lay
- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 5.0 mm
- Size: 9.84" x 39.37" (250 mm x 1000 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: 10-Year Heavy Commercial & Lifetime Residential



- Patent-Pending Coating • 30% More Scratch Resistance **Over Typical Coatings**
- Exceptional Wear Resistance and High Strength

ASTM F1700-13 SOLID VINYL FLOOR TILE:	CLASS III, TYPE B
ASTM D2047 STATIC COF FOR POLISHED SURFACES:	EXCEEDS INDUSTRY STANDARDS
ASTM F970-07 STATIC LOAD LIMIT:	PASSES
ASTM E648 CRITICAL RADIANT FLUX:	CLASS 1
ASTM E662 SMOKE DENSITY:	PASSES
ASTM F925 STAIN & CHEMICAL RESISTANCE:	EXCELLENT

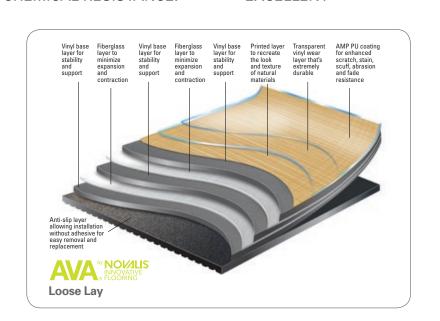

by NOVALIS INNOVATIVE R FLOORING

Other products in the AVA collection: AVA DSGN® AVA SNSE® AVA SPRK® AVA SMPL® AVA 2STYL[™] AVA RSRV[™]

With worldwide sales offices and distribut partners, Novalis® is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, Novalis has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, SNSE®, SPRK®, SMPL®, 2STYL™ and RSRV™ are trademarks of Novalis® Innovative Flooring.

© 2019 Novalis® Innovative Flooring

avaflor.com • 877.861.5292







AVARSE

npared to your average linear pattern hile the typical linear pattern gets ost when tiles are installed in the same ection, the pattern within VRSE tiles rives two different looks to create striking designs that stand out and get noticed for Workplace/Corporate, Hospitality and

The multi-directional look of VRSE offers

nique design and installation flexibility
































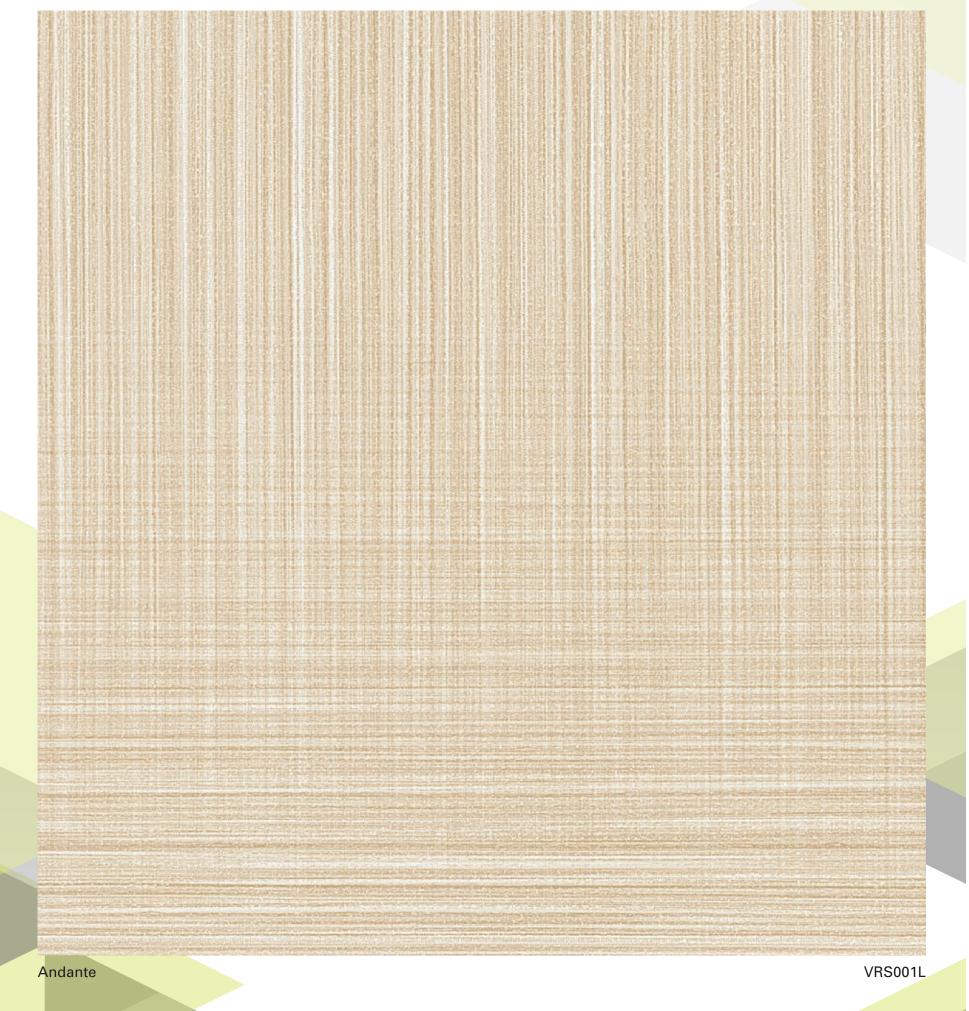

VRS003L


Chanson

Timbre VRS006L





VRS004L

VRS005L

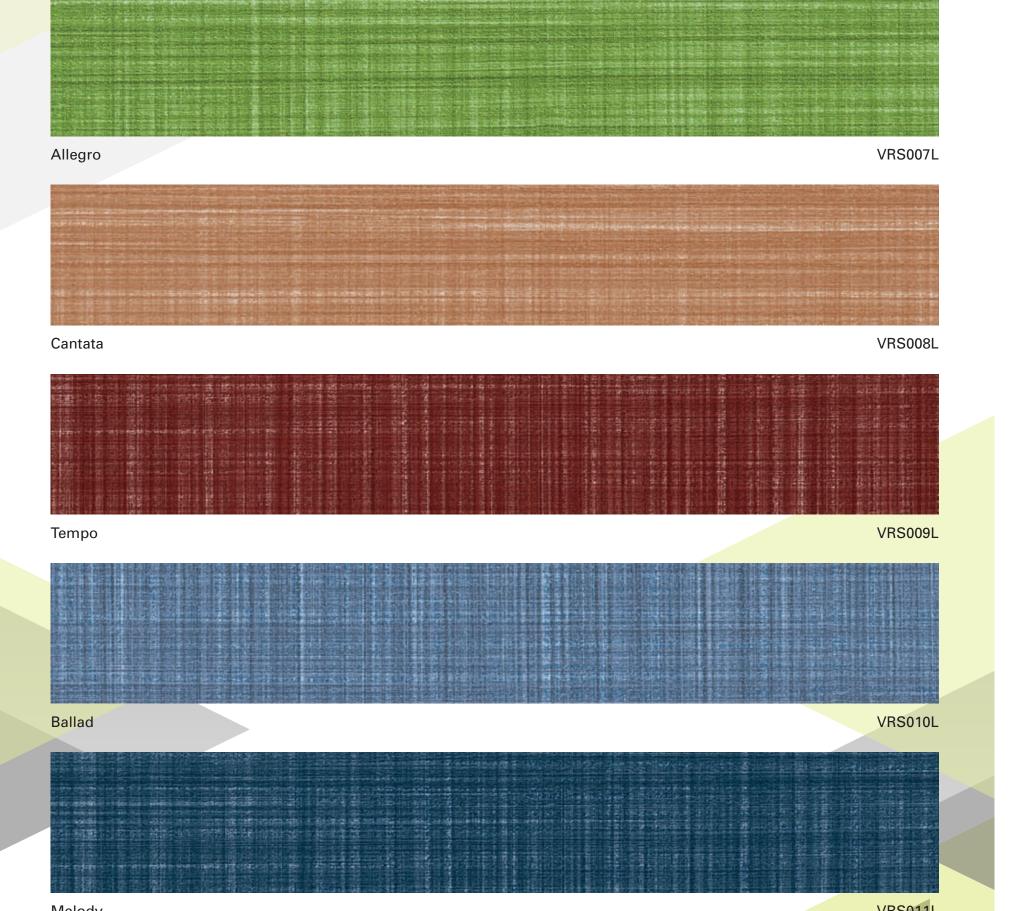



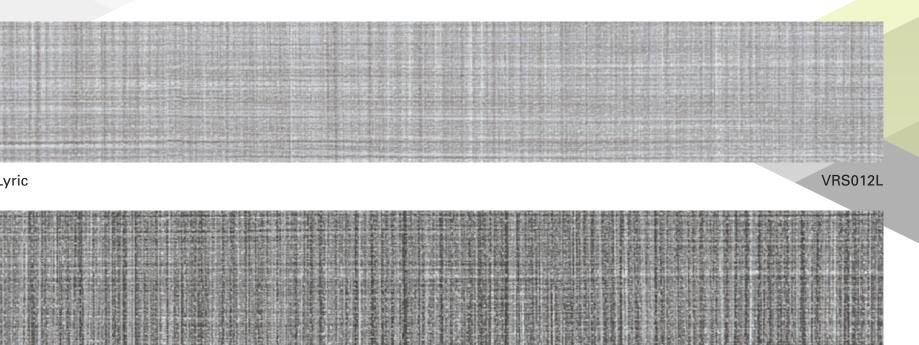

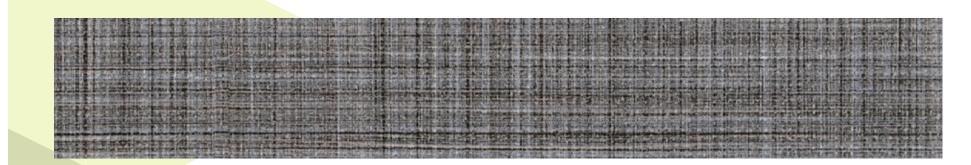





VRS014L



VRS016L Opera