


Specifications

- Sheet Vinyl
- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.3 mm
- 100% Phthalate Free
- Warranty: 12-Year Heavy Commercial

Packaging

- Roll Size: 6.56' (2 M) x 65.6' (20 M)
- Square Yards/Roll: 47.84
- Weight: 322 lbs.

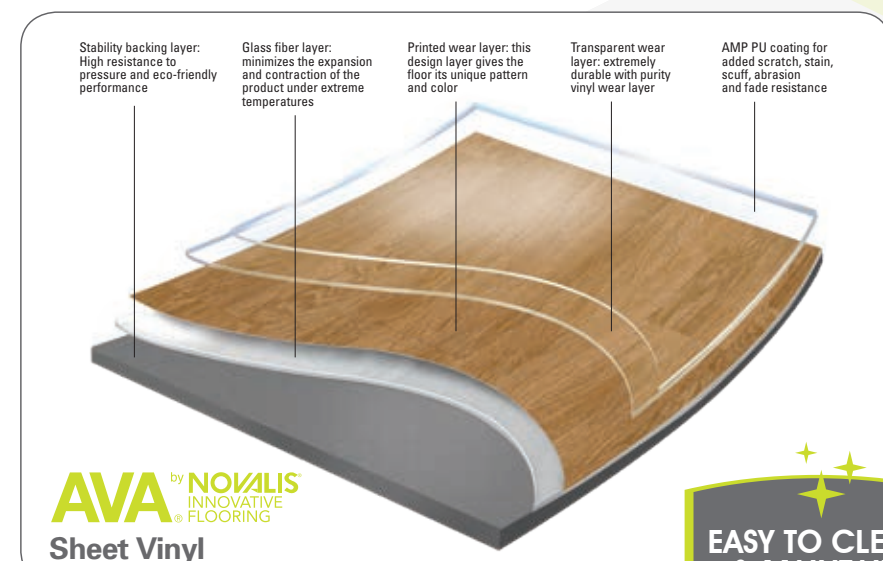

AVA[®] by NOVALIS[®] INNOVATIVE FLOORING
Sheet Vinyl

EASY TO CLEAN & MAINTAIN
No wax / No buff
Low-gloss finish



- Patent-Pending Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

ASTM F1303 SPECIFICATION CLASSIFICATION:	TYPE 1 (COMMERCIAL), GRADE 1, CLASS B
ASTM F386 THICKNESS:	2.3 MM
ASTM F2055 WIDTH:	6.56 FT (2 M)
ASTM F2055 LENGTH:	65.6 FT (20 M)
ASTM F410 WEAR LAYER:	22-MIL (0.55 MM)
ASTM E648 CRITICAL RADIANT FLUX (FLAMMABILITY):	PASS, NFPA CLASS 1, (REQUIRES > 0.45 WATTS/CM ²)
ASTM E662 OPTICAL SMOKE DENSITY (SMOKE):	PASS (REQUIRES < DMC 450)
ASTM F970 STATIC LOAD (RESIDUAL INDENTATION):	EXCEEDS REQUIREMENT
ASTM F1914 SHORT-TERM (RESIDUAL INDENTATION):	≤ 0.012-INCH (0.31-MM)
ASTM D2047 SLIP RESISTANCE:	EXCEEDS REQUIREMENTS
ASTM D4060 ABRASION RESISTANCE:	PASS
ASTM F137 FLEXIBILITY:	PASS
ASTM F925 CHEMICAL RESISTANCE:	PASS
ASTM F1514 HEAT STABILITY (COLOR CHANGE):	PASS
ASTM F1515 LIGHT STABILITY (COLOR CHANGE):	PASS

AVA[®] by NOVALIS[®] INNOVATIVE FLOORING

Other products in the AVA collection:
AVA DSGN[®] AVA SNSE[®] AVA SPRK[®]
AVA SMPL[®] AVA 2STYL[™] AVA VRSE[®]
AVA RSRV[®] AVA VEXX[™]

With worldwide sales offices and distribution partners, Novalis[®] is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, Novalis has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA[®], DSGN[®], SNSE[®], SPRK[®], SMPL[®], 2STYL[™], VRSE[®], RSRV[®] and VEXX[™] are trademarks of Novalis[®] Innovative Flooring.

© 2020 Novalis[®] Innovative Flooring

avaflor.com • 877.861.5292
sales@avaflor.com



AVA[®] REVV[™]

SHEET VINYL



NOVALIS[®]
INNOVATIVE FLOORING

AVA[®] REVV[™]

AVA[®] REVV[™]



With 13 realistic wood patterns protected by a highly durable 22 mil wear layer, REVV provides stability and ease of installation in a 2 M wide sheet flooring that is highly resistant to pressure and extreme temperatures.

REVV's inherent resistance to expansion and contraction make it an excellent selection for healthcare, education, retail and other applications where high traffic and heavy loads are an everyday affair.

No-wax maintenance makes for easy upkeep while the low-gloss finish maintains its stylish appeal with no buffing.



Arlington



Swatch Size 9"W x 4.5"

Arlington Provincial

REAL0002

EIR Embossing


The REVV Sheet Vinyl collection has an EIR embossing which stands for Embossed in Register.

EIR is a manufacturing method that creates a grain appearance consistent with the look of a real hardwood grain. This process aligns the embossing on the sheet with the printed wood grain design and intensifies the visual impact of the depth, texture and appearance of the floor while still providing durability and ease of maintenance.

Using a new and updated manufacturing technology, the REVV collection provides you what few others can – the warmth and intensity of a real wood esthetic with the durability to handle almost any heavy commercial application.



Arlington

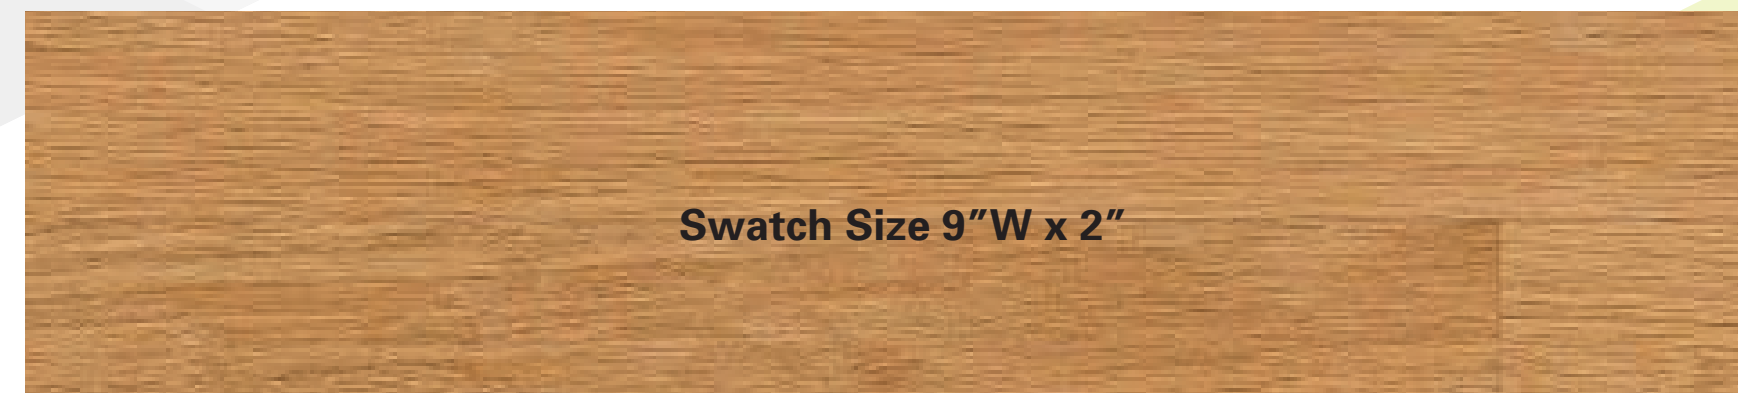

Swatch Size 9"W x 2"

Arlington Spice

REAL0001



Arlington Nickel

REAL0003



Arlington Cadet


REAL0004



Arlington Cinder


REAL0005

Kenton

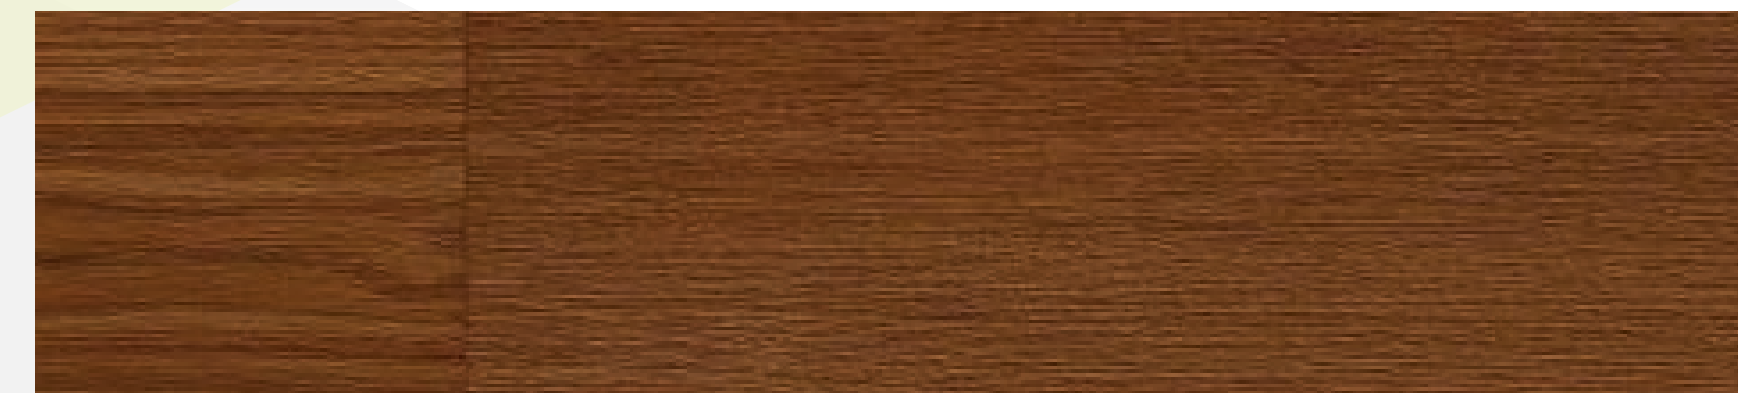


Kenton Cinnamon

REKT0001

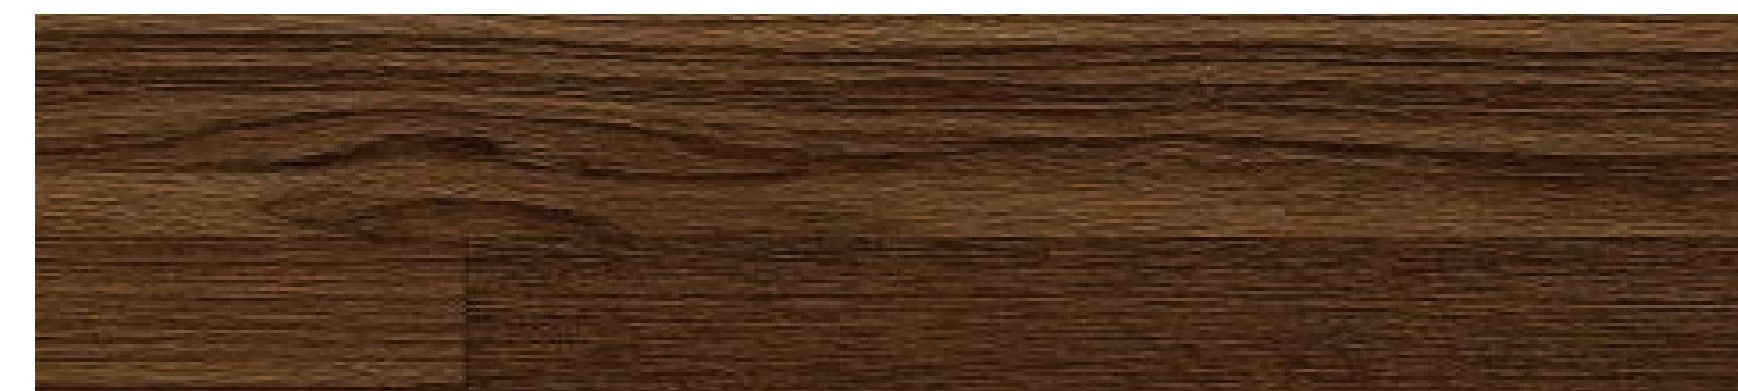

Kenton Espresso

REKT0002

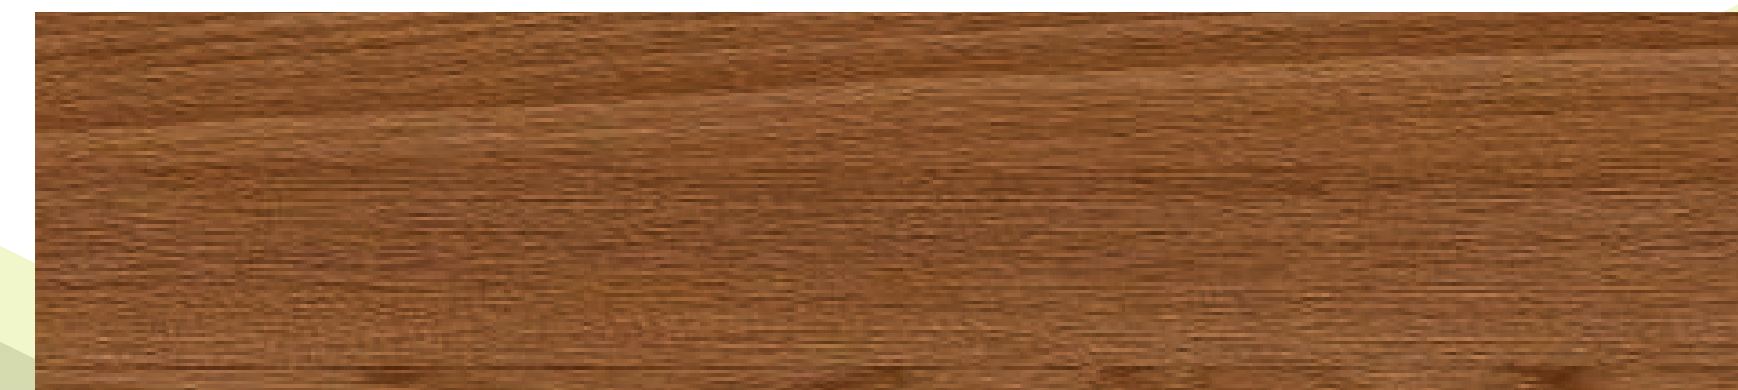

Kenton Tawny


REKT0003



Kenton Applesauce

REKT0004

Rawson

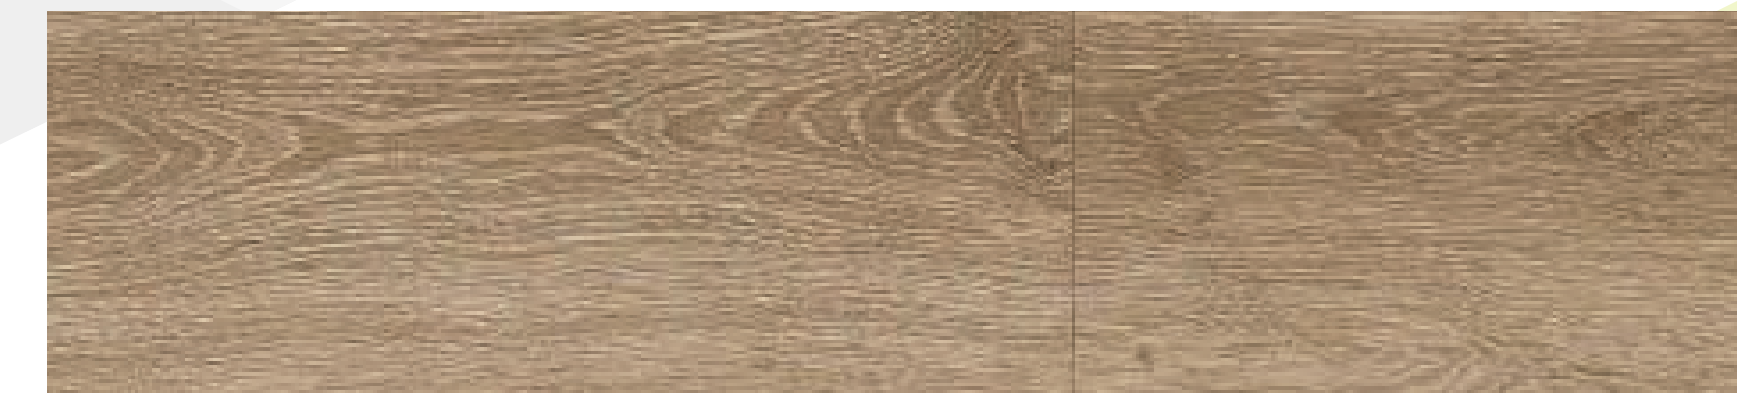

Rawson Bronze

RERW0001




Rawson Carob

RERW0002



Rawson Seal

RERW0003

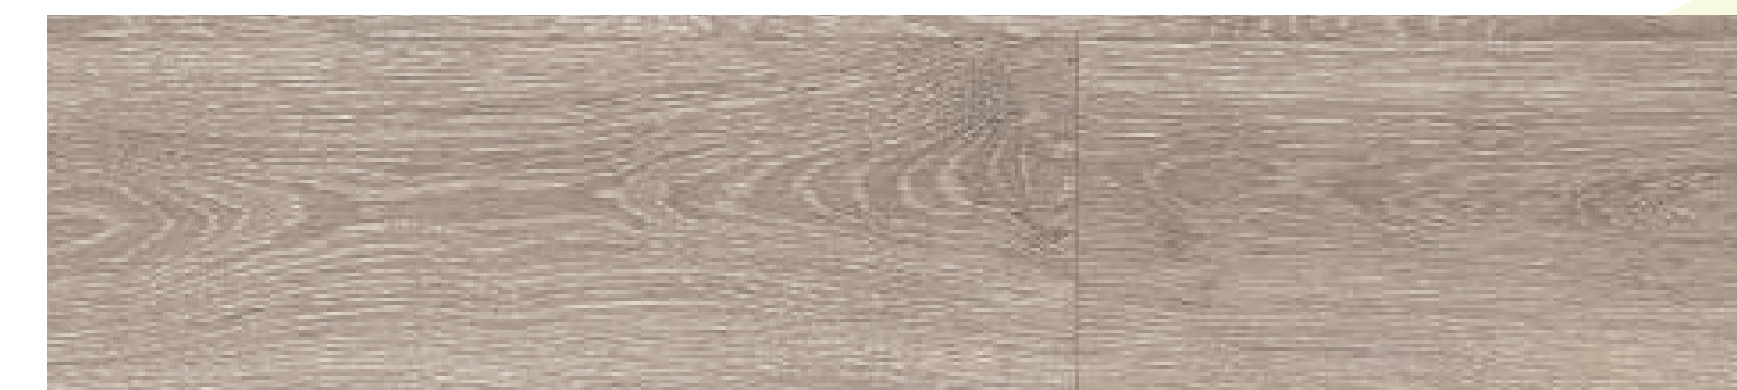

Rawson Beach

RERW0004