


Specifications

- Sheet Vinyl
- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.3 mm
- 100% Phthalate Free
- Warranty: 12-Year Heavy Commercial

Packaging

- Roll Size: 6.56' (2 M) x 65.6' (20 M)
- Square Yards/Roll: 47.84
- Weight: 322 lbs.

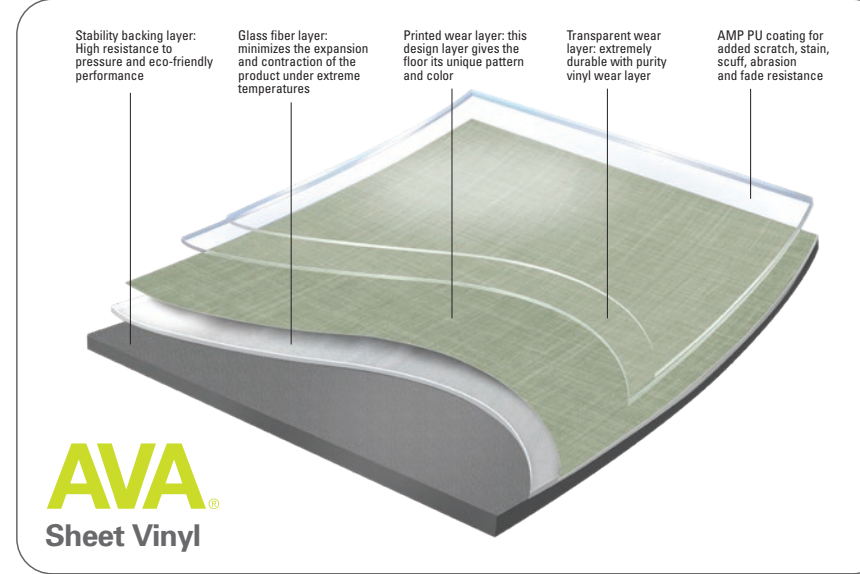

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

ASTM F1303 SPECIFICATION CLASSIFICATION:	TYPE 1 (COMMERCIAL), GRADE 1, CLASS B
ASTM F386 THICKNESS:	2.3 MM
ASTM F2055 WIDTH:	6.56 FT (2 M)
ASTM F2055 LENGTH:	65.6 FT (20 M)
ASTM F410 WEAR LAYER:	22-MIL (0.55 MM)
ASTM E648 CRITICAL RADIANT FLUX (FLAMMABILITY):	PASS, NFPA CLASS 1, (REQUIRES > 0.45 WATTS/CM ²)
ASTM E662 OPTICAL SMOKE DENSITY (SMOKE):	PASS (REQUIRES < DMC 450)
ASTM F970 STATIC LOAD (RESIDUAL INDENTATION):	EXCEEDS REQUIREMENT
ASTM F1914 SHORT-TERM (RESIDUAL INDENTATION):	≤ 0.012-INCH (0.31-MM)
ASTM D2047 SLIP RESISTANCE:	EXCEEDS REQUIREMENTS
ASTM D4060 ABRASION RESISTANCE:	PASS
ASTM F137 FLEXIBILITY:	PASS
ASTM F925 CHEMICAL RESISTANCE:	PASS
ASTM F1514 HEAT STABILITY (COLOR CHANGE):	PASS
ASTM F1515 LIGHT STABILITY (COLOR CHANGE):	PASS



AVA

Other products in the AVA collection:
 AVA DSGN® AVA SNSE® AVA SPRK®
 AVA SMPL® AVA 2STYL™ AVA VRSE®
 AVA RSRV® AVA REVV®

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, SNSE®, SPRK®, SMPL®, 2STYL®, VRSE®, RSRV®, REVV® and VEXX® are trademarks of Novalis® Innovative Flooring.

© 2020 Novalis® Innovative Flooring

avaflor.com • 877.861.5292
 sales@avaflor.com



AVA VEXX

SHEET VINYL



NOVALIS®
 INNOVATIVE FLOORING

AVA VEXX

AVA VEXX



With 3 organic patterns and 19 total colors, VEXX combines aesthetic appeal with stability and ease of installation in a 2 M wide sheet flooring that is highly resistant to pressure and extreme temperatures.

VEXX's highly durable 22 mil wear layer and inherent resistance to expansion and contraction make it an excellent selection for healthcare, education, retail and other applications that experience high traffic and heavy loads.

No-wax maintenance and no buffing makes for easy upkeep and a fresh appearance throughout years of reliable performance.



Flare



Flare Jardin

VEFL0001



Flare Sandstone

VEFL0002



Flare Wheat

VEFL0003



Flare Griffin

VEFL0004



Flare Frost


VEFL0005

Flare



Flare Mineral

VEFL0006

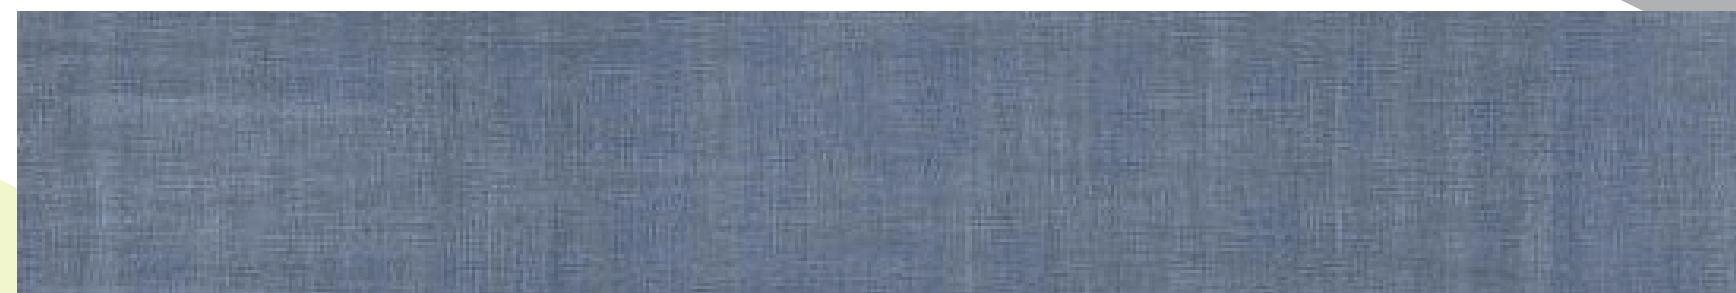

Flare Denim

VEFL0007




Flare Chocola

VEFL0008



Flare Marina


VEFL0009

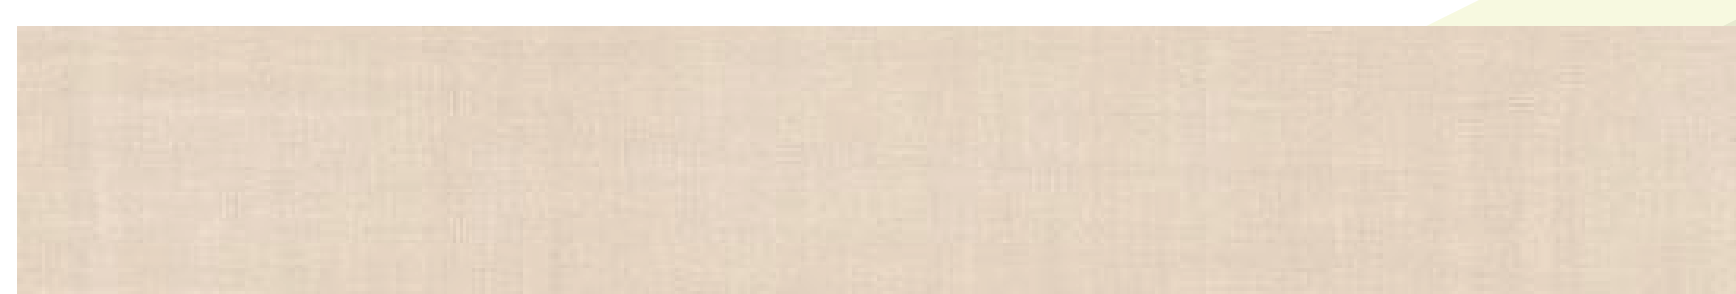

Flare Linen

VEFL0010

Burst

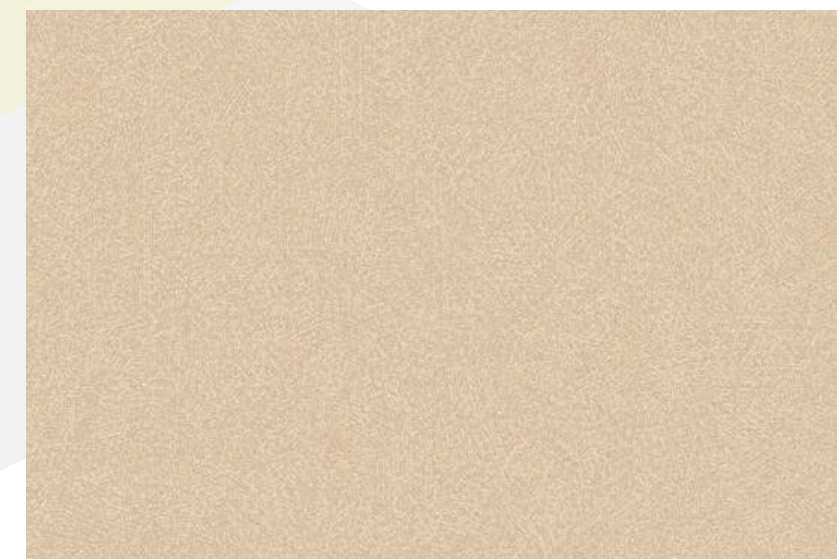

Burst Almond

VEBR0001



Burst Latte

VEBR0002




Burst Canyon

VEBR0003



Burst Biscuit

VEBR0004

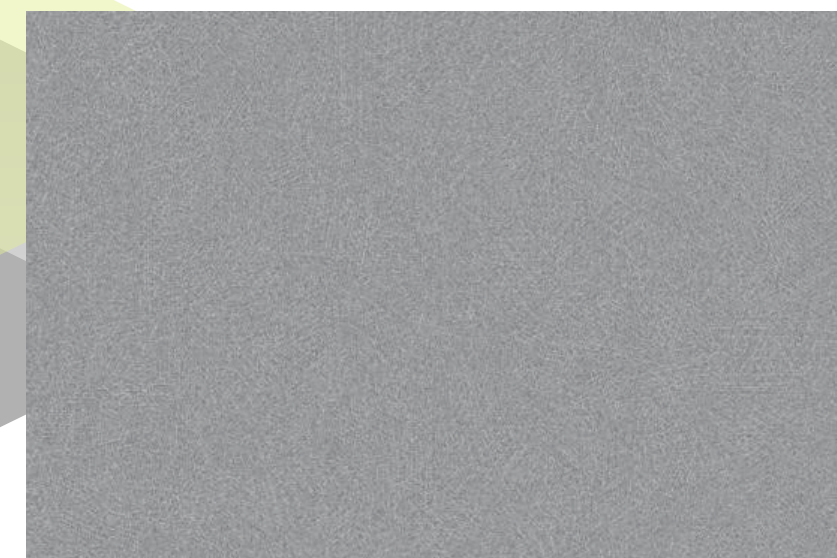

Burst Rhino


VEBR0005



Burst Iron


VEBR0006

Nebula

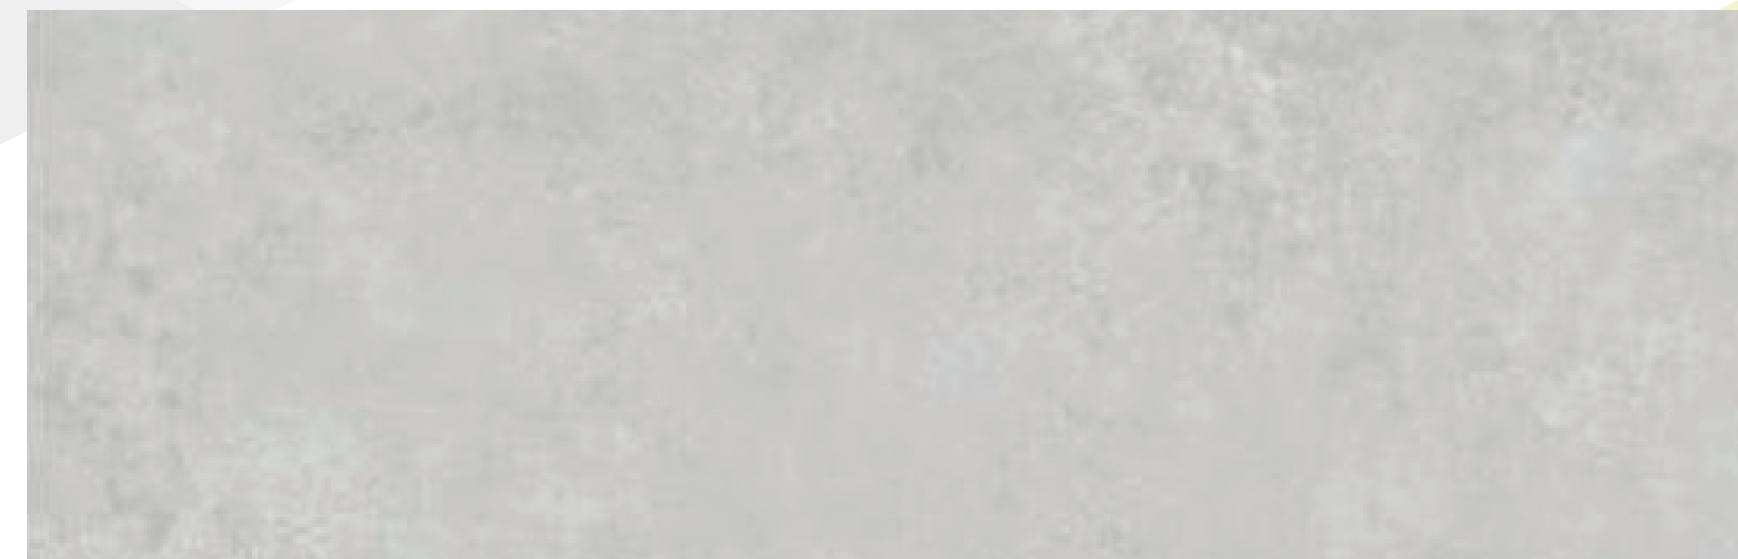

Nebula Horizon

VENB0001

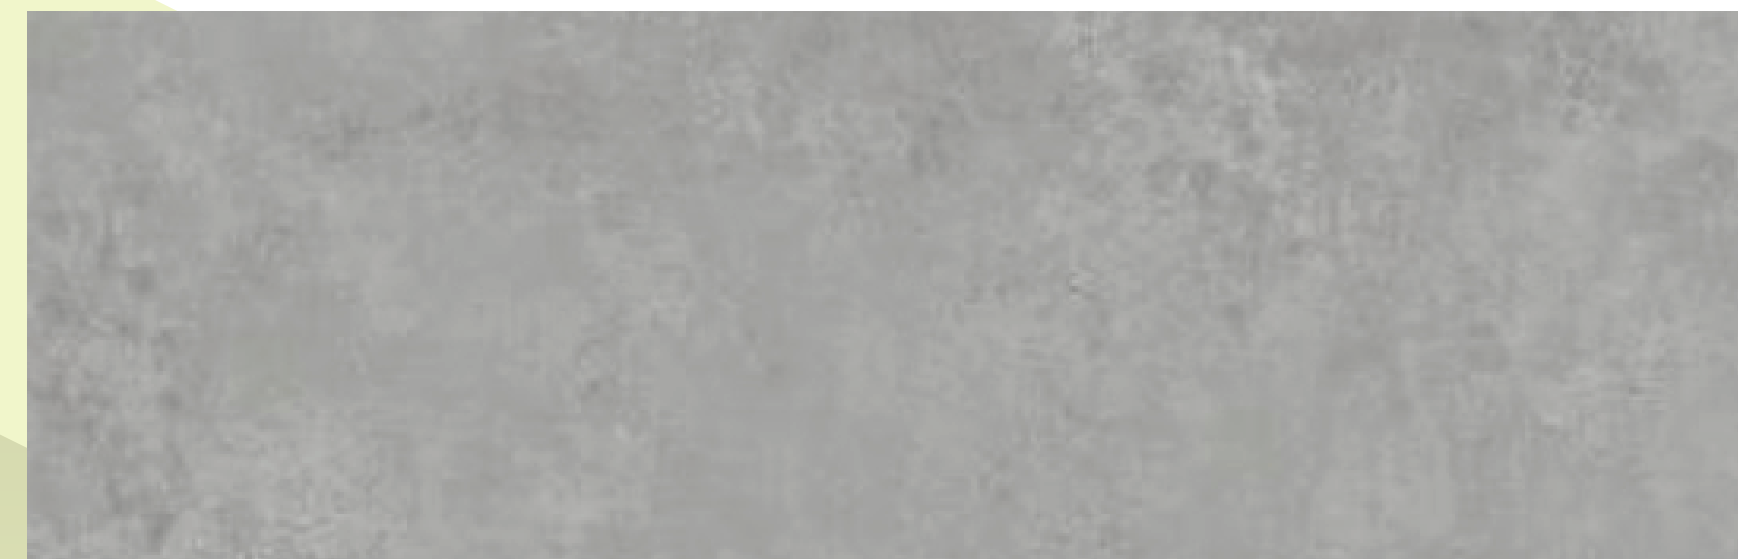

Nebula Dusk

VENB0002



Nebula Thunder

VENB0003